


## Translite Systems, Silo Pendant

Page 1 of 2

Catalog number:

Notes:

Type:

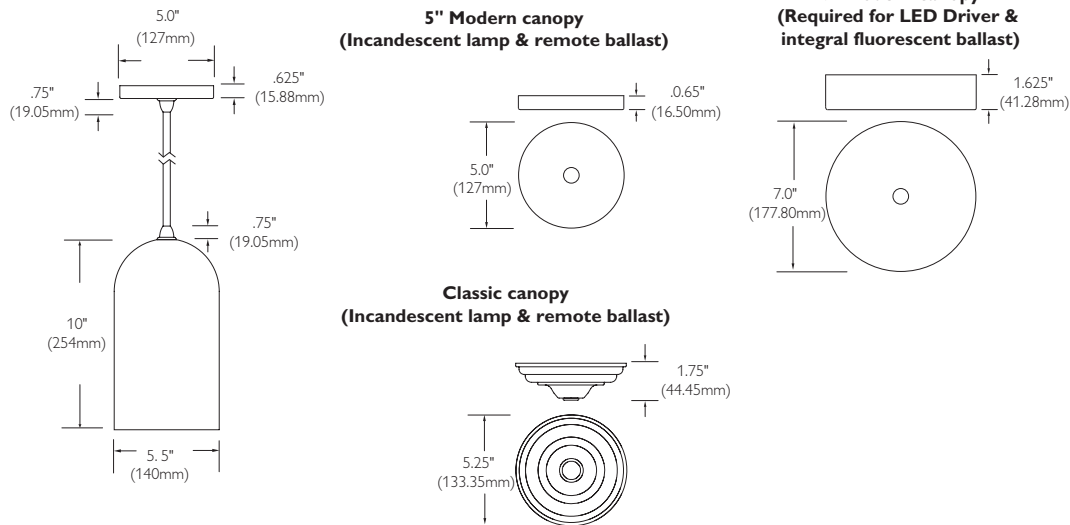

## Ordering information

Fixture	Diffuser color	Metal finish	Lamping	Option 1	Option 2
<b>SIL1</b> - Silo Pendant	<b>VR</b> - Mt. Vernon red <b>SW</b> - Sausalito white <b>TG</b> - Turner gold <b>PW</b> - Polar white	<b>SN</b> - Satin nickel <b>PN</b> - Polished nickel <b>RB</b> - Rubbed bronze <b>BK</b> - Black <b>WH</b> - White	<b>A100</b> - 100w A19, Medium base <b>F26</b> - 26w quad/triple GX24q-3 <b>F32</b> - 32w quad/triple GX24q-3 <b>N7-W</b> - 3 x 2.4W LEDs, 2700K (120V only) <b>N7-N</b> - 3 x 2.4W LEDs, 3500K (120V only)  *Integral ballast included with all fluorescent lamping options. *Fixture may be specified for emergency.	<b>WC</b> - White cord <b>CL</b> - Clear cord  (Fixture supplied with 108" of cord - field adjustable.)  <b>Note:</b> Cord options available with incandescent and fluorescent lamping only.	<b>CC</b> - Classic canopy* (5.25"Ø x 1.75"h) <b>M5</b> - Modern canopy* (5"Ø x 6.5"h)  *Fluorescent ballast must be remote.  <b>Note:</b> Canopy options available with incandescent and fluorescent lamping only.

## Translite Systems, Silo Pendant

Page 2 of 2

**Features**

1. **Description:** Seven layered, hand blown glass pendant with enamel white inner casing. Available in four diffuser colors and five metal finishes.
2. **Lamping:** 100w A19, medium base, 26w quad/triple, GX24q-3 and 32w triple, GX24q-3; 3 LED array in 2700K or 3500K producing approximately 300 lumens out of the luminaire.
3. **Cord options:** Optional white or clear cord available for incandescent and fluorescent options. 18/3 SJT black Kevlar cord standard for incandescent and 18/4 SJT black Kevlar cord standard for fluorescent. LED pendant provided with 20/2 AWG braided cable.
4. **Canopy options (incandescent):** standard with 5" modern canopy. Classic canopy optional.  
**Canopy options (fluorescent):** standard with 7" modern canopy and integral ballast. Classic canopy and 5" modern canopy optional, requires remote ballast.  
**Canopy options (LED):** Standard with 7" modern canopy.
5. **Electrical (fluorescent):** Integral ballast comes standard with fluorescent lamping options and standard modern canopy for fluorescent (7"Ø x 1.625"). 120v/277v dual voltage electronic ballast provided. Ballast may be mounted remotely at a maximum of 12 feet from the socket.  
**Electrical (LED):** Integral LED driver  
**Input voltage:** 120Vac  
**Nominal input power:** 7.2W  
**Dimming:** Triac
6. **Function:** Supplied with 108" of cord or cable. Field adjustable.
7. **Net weight:** 4 lbs.

**Diffuser colors**

1. Mt. Vernon red
2. Sausalito white
3. Turner gold
4. Polar white

**Metal finishes**

1. Satin Nickel
2. Polished Nickel
3. Black
4. White
5. Rubbed Bronze - finish is crafted with solid brass substrate and buffed by hand to create an authentic rubbed bronze finish. Due to this hand-applied process, finish may vary.

**Labels**

UL and cUL listed for dry locations only.



Philips Lightolier  
 e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
 t: (508) 679-8131  
 w: [www.lightolier.com](http://www.lightolier.com)

SIL1 May 30, 2012

Specifications are subject to change without notice.  
 © Koninklijke Philips Electronics N.V., 2012. All rights reserved.