


Catalog number:

Notes:

Type:

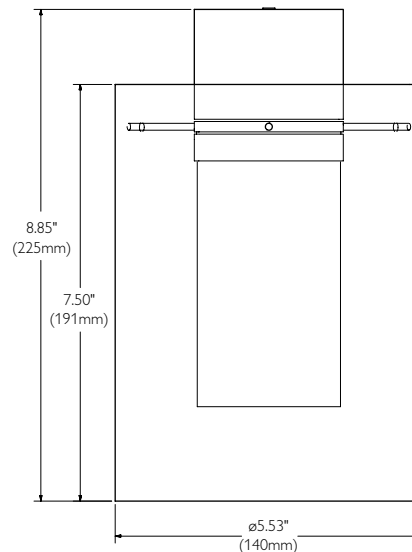

*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

Ordering information

| Fixture | System | Drop length | Lamping | Metal finish |
|----------------------|---|---|--|---|
| SUS1 - Suisun | CA4 - Cable 4" CA6 - Cable 6" TR4 - Twin Rail 4" TR6 - Twin Rail 6" BTC - Basis Ceiling LT - Liana NS - No system connector* | Cable: ST - Standard 68" for LED; 72" for halogen 24" - 72" - Specify length (in 12" increments) (When ordering a non-standard drop length, use whole numbers only - no fractional inches.) | N2-W - One 2.4W LED, 2700K (120V only) N2-N - One 2.4W LED, 3500K (120V only) Leave blank for bi-pin halogen lamping (lamp not included) | AL - Satin aluminum PN - Polished nickel GB - Gloss black ¹ WH - White ¹ (¹ Available for BT and NS only) |

Features

- Description:** Suisun fixture is a decorative mini glass pendant. The outer glass is clear and the inner glass is polar white. Open fixture rated low voltage.
- System options:** Suisun is available for Cable 4" & 6", Basis Ceiling Mount, Twin Rail 4" & 6", Liana, and low voltage monopoints.
- Lamping:** GY6.35 bi-pin 35w max., for use with open fixture rated lamp only (not included) or single LED in 2700K or 3500K producing approximately 120 lumens out of the luminaire.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connectors housed in aluminum.
Electrical (LED):
Input voltage: 12Vac
Nominal input power: 3.2W
Dimming: Not dimmable
- Function:** Suspended by field adjustable cable.
- Net weight:** 1.5 lbs.

Metal finishes

- Satin aluminum
- Polished nickel
- Gloss black
- White

Labels

UL and cUL listed for dry locations only.

Measuring overall length

Track system fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

| | Basis | Cable Twin Rail | Liana | NS |
|---------------------------------|-------|--------------------|-------|----|
| System Connector Measurement | .38" | .63" | .94" | 0" |

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.*

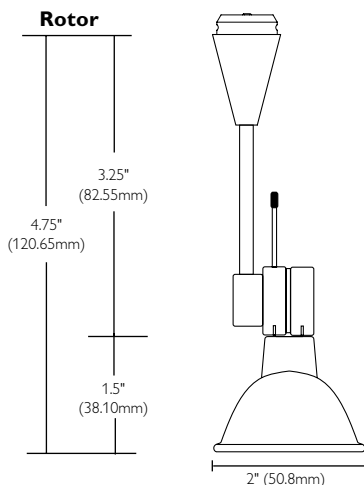

Track system fixture example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint fixture example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for

stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

SUS1 September 4, 2012

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.