


Ultra Slimlite Single Sided Sconce

Page 1 of 3

Catalog number:

Notes:

Type:

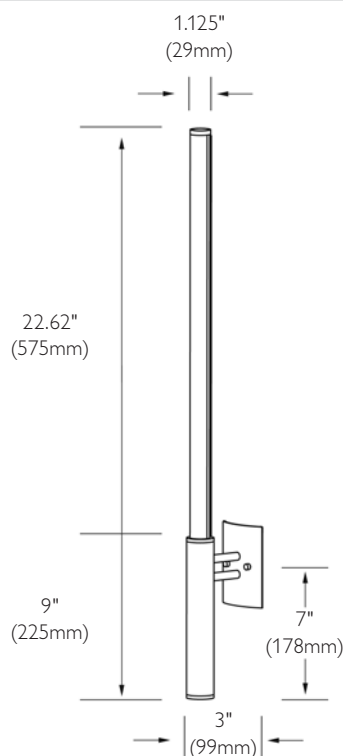


Ordering guide: USC

Fixture	Style	Ballast	Voltage	Canopy	Lens (for use with USC)
USC - Ultra Slimlite Sconce USP - Ultra Slimlite Palomar	S - Single Sided	S - Standard H - High Output	1 - 120V 2 - 227V	R - Remote Ballast B - Integral Ballast	N - No lens C - Clear P - Prismatic Acrylic O - White Opaque

Diffuser (for use with USP)	Finish
FL - Flute LN - Linear RD - Reed PS - Prismatic SQ - Square RN - Rain OP - Opal Acrylic SS - Sunset	A - Aluminum N - Satin Nickel R - Bronze

Ultra Slimlite Single Sided Sconce

Page 2 of 3

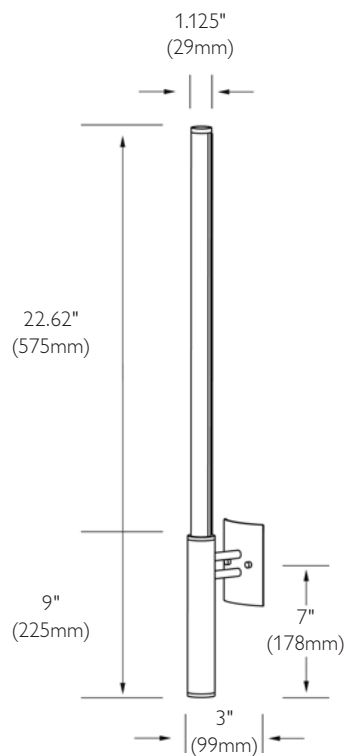

Features

- Description:** Low profile fluorescent ADA compliant sconce constructed of 1.125 extruded aluminum tubing. Snap-in diffuser available in 3 styles.
- Lamping:** Designed for 14 watt or 24 watt single T5 lamps.
- Electrical:** May be powered by integral or remote ballast, standard or high output. Available for 120V or 277V. Sconces mount easily to a 2" x 3" single-gang utility box. Each fixture requires a separate power feed and ballast.
- Function:** Lamp tube swivels 330 degrees. Fixture may be mounted in any orientation.

Diffusers

- FL** - Flute
- LN** - Linear
- RD** - Reed
- PS** - Prismatic
- SQ** - Square
- RN** - Rain
- OP** - Opal Acrylic
- SS** - Sunset

Lens

- No Lens**
- Clear**
- Prismatic Acrylic**
- White Opaque**

Metal Finishes

- Aluminum**
- Satin Nickel**
- Bronze**
- Custom finish:** Contact factory for custom powder coating options. Must provide RAL number.

Labels

UL and cUL listed.

Ultra Slimlite Single Sided Sconce

Page 3 of 3

No lens

Order fixture without lens for maximum light output.

Zone	% Lamp
0 - 40	22.73
40 - 90	33.40
0 - 90	56.13



Clear lens

Provides lamp protection and minimal interference with light output.

Zone	% Lamp
0 - 40	16.64
40 - 90	19.91
0 - 90	36.55



Prismatic lens

High performance prismatic lens provides broad light distribution.


Zone	% Lamp
0 - 40	18.38
40 - 90	26.20
0 - 90	44.58



White opaque lens

Completely shields the lamp for glare free lighting. Perfect for vanity applications.

Zone	% Lamp
0 - 40	13.47
40 - 90	21.53
0 - 90	35.00

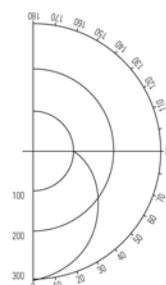

Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

USC May 21, 2012

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.