

application

 LED back-lit single-face LED sign. LED light source provides virtually maintenance-free operation.
 Black, red or green letters on a white (or black) background, or in a "disappearing" version where the illuminated red letters remain hidden when the sign is off.

construction/finish

- 3" deep extruded aluminum housing with mitered corners.
- Back plate is formed from 0.050" aluminum and adds 0.25" to the overall depth of the sign.

lamps

- LED light source provides low energy consumption.
- Message panel is back-lit with solid state LED panel with integral driver.
- · Low 9W operating cost.

mounting

- Four (4) mounting holes on the back plate.
- Optional mounting accessories available.
- 7/8" knockout for electrical connection.
- Body of the sign hooks onto the back plate and is locked into place with two screws.

electrical

- Available for 120 and 277 volt applications.
- The sign draws 9 watts and 0.42 Amps (120V).
- · UL and CUL listed for wet locations.

faceplate

- Message panels are 0.125" thick, translucent acrylic with stencil cut applied vinyl graphics.
- Additional 0.125" thick, clear acrylic exterior face panel over the message panel to protect lettering.
- Exterior panel for "disappearing" version tinted to hide the message when the sign is off.
- All panels securely captured within the sign frame.
- Twenty-six (26) standard messages with additional custom messages available upon request.

warranty

 All luminaire components are warranted for 5 years from original date of shipment.

Signage LAS

Single-Face LED Signage



Specifier's Reference


Project

Туре

Model No.

Comments

Sample Model No.: LAS - 120 - RW - TO EXIT - CMB

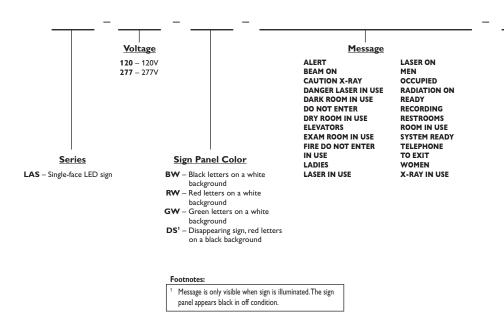



Options


RFR – Recessed frame
CMB – Ceiling mount bracket
SMB – Side mount bracket
PMB – Pendant mount bracket
FLASH – Message flashing
(60 times/min.)



dimensions







Note: Dimensional data for all of the mounting options can be found on the extended specification sheet online at www.vistalighting.com



BW - Black Letters on White Sign Panel



RW - Red Letters on White Sign Panel



GW - Green Letters on White Sign Panel



DS - Disappearing Signage, Red Letters on Black Panel


message options

ALERT	BEAM ON	CAUTION X-Ray	DANGER LASER IN USE	DARKROOM In USE	DO NOT Enter	DRY ROOM In Use
ELEVATORS	EXAM ROOM IN USE	FIRE DO NOT ENTER	IN USE	LADIES	LASER IN USE	LASER ON
MEN	OCCUPIED	RADIATION ON	READY	RECORDING	RESTROOMS	ROOM IN USE
SYSTEM READY	TELEPHONE	TO EXIT	WOMEN	X-RAY IN USE		




©2012 Philips Vista All rights reserved. Rev. 01/12

11500 Melrose Avenue Franklin Park, IL 60131 p. 800.576.2135 • f. 800.576.2136 www.vistalighting.com







dimensions




RFR - Recessed Frame



CMB - Ceiling Mount Bracket




SMB - Side Mount Bracket



40" max. (1016mm)
(Can be field cut to length)

DIMENSIONS							
A	B	©	(D)				
1-1/2" (38.1mm)	1-7/8" (47.6mm)	1-1/8" (28.6mm)	1-1/16" (27mm)				





©2012 Philips Vista All rights reserved. Rev. 01/12

11500 Melrose Avenue Franklin Park, IL 60131 p. 800.576.2135 • f. 800.576.2136 www.vistalighting.com

