

PR3SC Series

Protector Round 13" Shallow, Ceiling Mount - Vandal Resistant (CF only)

Type:	Job:											Approvals:
Catalog Number:												
PR3	S	C										
Series/Shape-Size	Depth	Mount	Wattage	Source	Options	Base Color	Voltage	Face Style	Lens	Face Color	Accessories (Field Installed)	Date: Page 1 of 2

Ordering Example: PR3SC142HFLB8GCB


Overall Dimensions For Reference Only

Vandal Resistant
Protector Round 13"
Shallow, Ceiling Mount


Weight:
1.0 lbs 4.99 kgs

PR3SC

Grid
face style



Open Bezel
face style



Applications

The Protector Round 13" Series is ideal for high-traffic areas requiring architectural ceiling-mounted vandal-resistant luminaires.

Specifications

Construction

Precision die-cast 360 alloy marine-grade aluminum back plate with cast-in mounting knock-outs. Polyester powdercoat finish (back-plate only). One-piece injection-molded, UV-stabilized polycarbonate face with snap-in, interlocking lens. Color molded into the polycarbonate face for durable, scratch-resistant finish. Locking recessed set screw at the 1:00 o'clock position is unobtrusive, securely locking the face and lens to the cast housing. Constructed to IP54.

Electrical

Die-cut neoprene rubber gasket provides added protection between back casting and mounting surface. Silicone rubber gasket seals optics/face to outer rim of back casting. Electronic HPF ballast with 120-277 voltage sensing capability.

Optics

One-piece, injection-molded, UV-stabilized polycarbonate lens. Internal prisms re-direct light minimizing hot spots and maximizing uniformity. Lens available in clear prismatic or opal prismatic polycarbonate. Twist and seal construction locks the lens and face to the back casting. Extruded silicone gasket provides a tight, weather-resistant seal. Supplemental Impact System (SIS) provides

a cushion that supports/seals the lens against the elements and also acts as a shock absorber to help reduce damage from impact to the unit face. High-reflectance white pan reflector.

Mounting / Distribution

Ceiling mount units have a symmetric Type V distribution. Mounts to standard recessed 4" J-Box, by others.

Finish

Die-cast aluminum **Base colors:**

B Textured Black
W Textured White
P Textured Bronze

Polyester powder coating.

Molded polycarbonate **Face colors:**

B Black
W White
P Bronze

Accessories

Vandal-resistant access tool available. Trim ring accessories not available.

Listings

UL/cUL 1598 listed, suitable for Wet Locations. The quality systems of this facility have been registered by UL to the ISO 9001 Series Standards.

Warranty / Terms and Conditions

Standard 5 Year Limited Warranty. The current Philips Wide-Lite Warranty may be found at www.wide-lite.com (keyword: warranty) as well as the current Standard Terms and Conditions of Sale (keyword: terms).

All sales of items in this catalogue shall be subject to the Philips Wide-Lite Standard Terms and Conditions of Sale current at the time of shipment. If you do not have a copy of the Philips Wide-Lite Warranty and Standard Terms, please contact the factory for same prior to ordering.



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled 'Contain Mercury' and/or with the symbol 'Hg'. Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycle and disposal can be found at www.lamprecycle.org.


PR3SC Series

Protector Round 13" Shallow, Ceiling Mount - Vandal Resistant (CF only)

Type:

Job:

Page 2 of 2

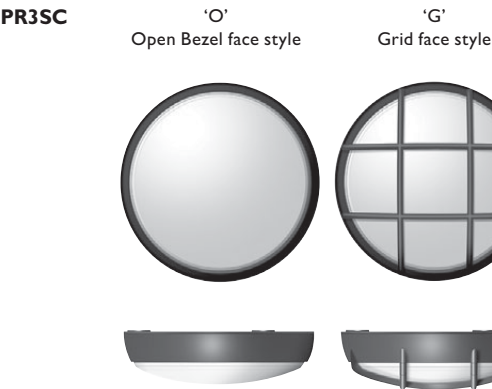

Ordering Example: PR3SC142HFLB8GCB

Series/Shape/Size	Depth	Mount	Wattage	Source	Options	Base Color	Voltage	Face Style	Lens	Face Color
<input checked="" type="checkbox"/> PR3 Protector Round 13"	<input checked="" type="checkbox"/> S Shallow	<input checked="" type="checkbox"/> C Ceiling	<div>Compact Fluorescent</div> <div><input type="checkbox"/> 113 1x13</div> <div><input type="checkbox"/> 118 1x18</div> <div><input type="checkbox"/> 126 1x26</div> <div><input type="checkbox"/> 132 1x32</div> <div><input type="checkbox"/> 142 1x42</div> <div><input type="checkbox"/> 213 2x13</div> <div><input type="checkbox"/> 218 2x18</div> <div><input type="checkbox"/> 226 2x26</div>	<div>Compact Fluorescent</div> <div><input type="checkbox"/> HF high power factor</div>	<div><input type="checkbox"/> L¹ Lamped</div> <div><input type="checkbox"/> F Fusing (single or double fused) (specify voltage)</div>	<div><input type="checkbox"/> B Textured Black</div> <div><input type="checkbox"/> W Textured White</div> <div><input type="checkbox"/> P Textured Bronze</div>	<div><input type="checkbox"/> 8 120-277</div>	<div><input type="checkbox"/> B Open Bezel</div> <div><input type="checkbox"/> G Grid</div>	<div><input type="checkbox"/> O Opal</div> <div><input type="checkbox"/> C Clear</div>	<div><input type="checkbox"/> B Black</div> <div><input type="checkbox"/> W White</div> <div><input type="checkbox"/> P Bronze</div>

Notes: 1. Supplied with appropriate lamp.

Accessories (must be ordered separately) (field installed)

☐ **VRTOOL** Vandal-resistant access tool

Notes



ISO 9001
Certified