



## LyteSwitch Two

Simple-P user button control  
button and key stations

Simple-P button user interface stations offer a simple and attractive way to control or override lighting schedules in a LyteSwitch Two system. Each user definable button controls individual relays, groups, or presets through an entire Simple-P network. The Simple-P key station will override lighting schedules.

### Common Features

- Made in the USA
- Status LEDs indicate the true state of a relay, group, or preset
- Powered from the Simple-P bus
- RJ45 connectors for easy connection
- Addressable rotary switches
- Programmable to control any relay(s), group(s), or preset(s) in the network
- Mounts in a standard, single gang electrical box
- Remote mount anywhere on the LyteSwitch Two network

### Button station features

- Available in one to six button configurations
- Provides audible feedback upon activation

### Key station features

- Available as a momentary or held switch (each sold separately)
- High quality 5-tumbler key access provides an extra level of security


Job Information:	Device Type:	_____
Job Name: _____		
Cat No.: _____		
Notes: _____		Qty: _____

# PHILIPS

# Lyteswitch Two

## Simple-P button and key control stations

### Dimensions

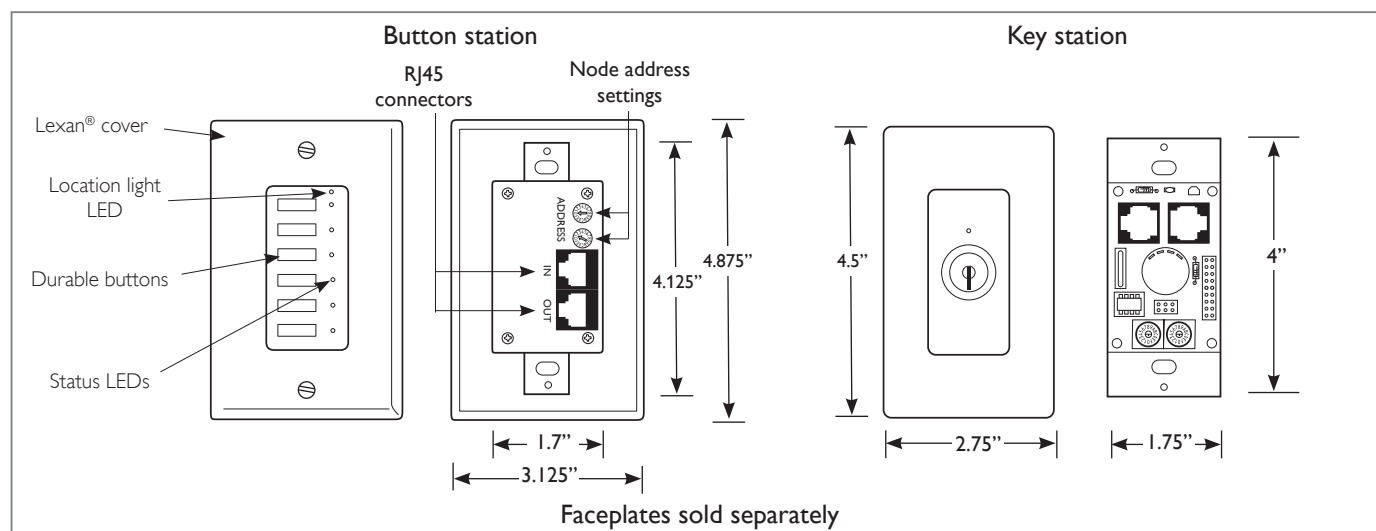

### Specifications

#### Physical

- Standard, single gang mounting configuration
- Easy to use RJ45 connectors
- Digital addressing switches
- Available in white
- Compatible with Decora style faceplates (sold separately)

#### Electrical

- Powered from the LyteSwitch Two panel or the Simple-P bus

#### Operating environment

- Location: Interior space
- Operating temperature: 32° to 122° F (0° to 50° C)
- Humidity: 10% - 90% non-condensing
- Atmosphere: non-explosive/corrosive
- Vibration: stationary

#### Certifications

- UL 916
- FCC Part 15, Class A

### Ordering

Table 1: Button and key station part numbers and descriptions

Part number	Description
DC-DRE-SP1-001	Simple-P 1 Button User Control Panel
DC-DRE-SP2-001	Simple-P 2 Button User Control Panel
DC-DRE-SP3-001	Simple-P 3 Button User Control Panel
DC-DRE-SP4-001	Simple-P 4 Button User Control Panel
DC-DRE-SP5-001	Simple-P 5 Button User Control Panel
DC-DRE-SP6-001	Simple-P 6 Button User Control Panel
DC-DRE-SPMK-001	Simple-P Key Momentary UI
DC-DRE-SPHK-001	Simple-P Key Held UI



©2013 Philips Lighting Electronics N.A.  
A Division of Philips Electronics North America Corporation.

All rights reserved.  
Published and printed in USA December 2013

Form number: DS.DRESP1.12122013

Philips Lighting  
Customer Support: +1-800-526-2731  
[www.philips.com/lightingcontrolsna](http://www.philips.com/lightingcontrolsna)