

CM10R

10" Remodel Metal Plaster Frame



Catalog Number: _____

Type: _____

Project: _____



Features

- Designed for remodel construction.
- The CM10R 10" remodel housing is U.L. listed for use in Non-IC rated ceiling applications.
- The housing is a precision made black cone constructed from high grade spun aluminum.
- Remodel clips are supplied with the housing and are easily installed in existing plaster or mechanical ceilings from 1/2" to 1-1/4" thick.
- A large 47 cubic inch junction box constructed of .063" galvanized steel is attached to the housing.
- The CM10R is suitable in environmental air-handling systems.
- Not available for use with HID or Emergency Compact Fluorescent.

C1 SYSTEM

There are three components to the Capri One (C1) System. The first component is the plaster frame, the second is an electrical system, and the third is a trim. Use this specification sheet to order the CM10R metal plaster frame only. Use the CM10 series specification sheets to order a complete fixture.

Frames

Metal remodel frames can be ordered for 10" apertures. The C1 system is unique. C1 plaster frames can be installed even before a choice of electrical system is made.

Electrical Systems

A wide variety of electrical systems are available for use for all C1 plaster frames. Capri One electrical systems are completely interchangeable between all frame sizes, apart from a few wattage restrictions. Electrical connections are made through a single junction box door, which allows all electrical systems to snap easily into place on the frame. All Capri One electrical systems come with pre-installed quick connectors for fast and simple electrical splices. Electrical systems may be ordered separately, or together with a frame.

Trims

Trims are low iridescent semi-specular aluminum, and come standard with a separate, white polycarbonate trim ring. A wide selection of trims can be ordered with lenses or baffles, or lensed and baffled inserts can be purchased as accessories for installation at a later time if desired. Many C1 trims are listed for use in wet location areas. Trims are held in place with expandable torsion springs to ensure a flush finish along the ceiling.

ORDERING EXAMPLE:

FRAME

CM10R*
C1 Remodel Metal Plaster
Frame Suitable for use in
air-handling spaces.

ELECTRICAL SYSTEM


FV26/32/42U
Operates 1-26W, 1-32W or
1-42W compact fluorescent
vertical unit with 120V-277V
electronic ballast.

TRIMS

V105WB
Vertical, 10" low iridescent clear
reflector and white baffle.

*Not suitable for HID, emergency compact fluorescent electricals or sloped ceiling trims.

DIMENSIONS

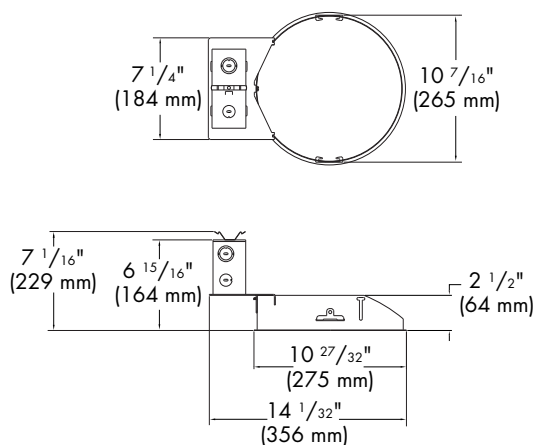

REV. 02/05

Capri Lighting reserves the right to make changes without notice.©2004

COF-8

CAPRI LIGHTING:
776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.caprilighting.com

THOMAS LIGHTING CANADA:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 800.268.0003
www.thomaslightingcanada.com

capri
L I G H T I N G