

Type No. \_\_\_\_\_

Catalog No. \_\_\_\_\_

Job. Name \_\_\_\_\_

# Revolution Series

## LED Architectural Luminaire

### APPLICATIONS

- Used primarily to decorate and draw attention to specific merchandise displays
- Compact R5 applications include offices, public buildings, high-end boutiques and shops, supermarkets, retail and big box stores

### CONSTRUCTION

- Die cast aluminum ballast housing
- Standard finish Duraplex II aluminum electrostatic powder coat
- Mercury and lead free design and ROHS compliant electronics
- Optional colors available

### ELECTRICAL

- Designed around Philips LED remote phosphor technology
- Paired with one of the most efficient LED drivers on the market
- Provides 62 lm/w with a high light output of 1,100 lm using only 18w of energy

### OPTICS


- Miniature specular aluminum reflector provides 55° cutoff
- Low glare, uniform color and no hot spots
- 4000K, 80 CRI
- 70% lumen maintenance after 50,000 hours
- No Ultra-Violet (UV) or Infrared (IR)

### MOUNTING

- Mounting choices include 1/2" NPS pendant (standard) (stem by others)
- Decorative hook with cord (optional)
- Aircraft cable with coiled or straight cord (optional)

### WARRANTY/LISTINGS

- CSA Approved for damp locations
- Published three year limited warranty

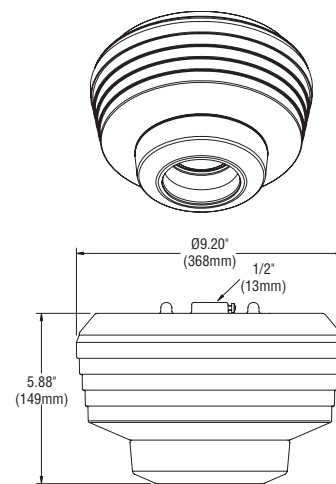

### Ordering Guide Example: RLED18RPSDW-8

<div>R</div>	<div>LED</div>	<div>18</div>	<div>RP</div>	<div>SD</div>	<div>W</div>	<div>8</div>
<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>
Series Designator	Size	Lamp Wattage	Source/Ballast Type	Mounting	Finish	Voltage
R=Revolution	LED	18=18 watt	RP=Remote Phosphor	SD=Std. 1/2" Hub C4=4' Coil Cord C6=6' Coil Cord C0=10' Coil Cord S4=4' Straight Cord S6=6' Straight Cord S0=10' Straight Cord	B=Flat Black W=Flat White A=Aluminum	8=120-277

## ExceLine

1611 Clovis R. Barker Road • San Marcos, TX 78666  
800.545.1326 • 512.392.5821 • Fax: 512.753.1122 • [www.exceline.com](http://www.exceline.com)

PT#: EXSP0152A0812

Product information is subject to change without notice

**PHILIPS**