
# **Anchor Base Post (778-) Specification Sheet**

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

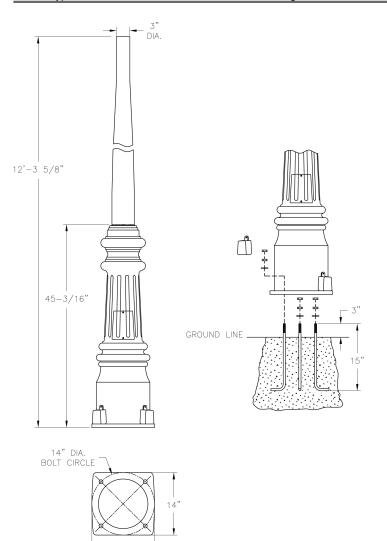

# **Ordering Guide**

Example: 778- 12 ABS 3 B B D

Dundret Code	770	Analan Dana
Product Code	778-	Anchor Base
		Post
Height(s)	12	(12 ft.)
	14	(14 ft.)
	16	(16 ft.)
Finish	ABS	Antique Brass
	ACP	Antique Copper
	ARD	Antique Red
	ASI	Antique Silver
	BLK	Black
	BRN	Brown
	BRZ	Bronze
	FGN	Forest Green
	GRA	Granite
	IRN	Ironstone
	RBZ	Rustic Bronze
	SRT	Shadow Rust
	VBZ	Verde Bronze
	VCP	Verde Copper
	VGN	Verde
	VTC	Vintage Copper
	WBZ	Weathered
		Bronze
	WHT	White
Tenon Option	3	3" dia.
Tomon opinon	4	4" dia.
Photoeye (Optional)	В	120V
i notocyc (optional)	Č	208V - 277V
O	В	
Outlet Location (Optional)	P	4" from Top of
	lτ	Base
	'	12" from Top of
		Pole
Outlet Options (Optional)	D	Standard Duplex
	G	GFI Duplex
	•	

### **Specifications**

# OUTLET:

GFI Duplex Outlet has dual-function indicator light, universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant. Standard Duplex Outlet has universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant.

#### **CONSTRUCTION:**

Cast aluminum anchor base. Cast aluminum removable access door. Tapered post welded to base. Cast aluminum anchor bolt covers included with post.

#### FINISH

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

#### WARRANTY:

Three-year limited warranty.



# Anchor Base Post (778-) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Tenon/Top:

3" O.D.

**Bolt Circle:** 

14" dia.

**Anchor Rods:** 

(4) 3/4" dia. x 15" long galv. steel

**Base Dimensions:** 

14" sq. x 45 3/16"

Shaft:

5" to 3" Tapered

Wall Thickness:

.188'

Height:

12', 14', 16'

# **Pole EPA Values**

	Height		
Windspeed(mph)	12'	14'	16'
80 ` . ,	35.5400	27.8300	22.5800
110	18.7500	15.4600	12.9000
130	15.6200	11.6600	8.8600

