
## **Anchor Base Post (779-) Specification Sheet**

 Project Name:
 Location:
 MFG: Philips Lighting

 Fixture Type:
 Catalog No.:
 Qty:

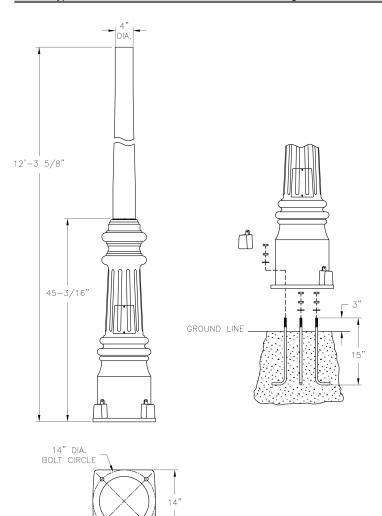

### **Ordering Guide**

Example: 779- 12 ABS 3 B B D

Product Code	779-	Anchor Base	
		Post	
Height(s)	12 14 16	(12 ft.) (14 ft.) (16 ft.)	
Finish	ABS ACP ARD ASI BLK BRN BRZ FGN GRA IRN RBZ SRT VBZ VCP VGN VTC WBZ	Antique Brass Antique Copper Antique Red Antique Silver Black Brown Bronze Forest Green Granite Ironstone Rustic Bronze Shadow Rust Verde Bronze Verde Copper Verde Vintage Copper Weathered Bronze White	
Tenon Option	3 4	3" dia. 4" dia.	
Photoeye (Optional)	B C	120V 208V - 277V	
Outlet Location (Optional)	В	4" from Top of	
	Т	Base 12" from Top of Pole	
Outlet Options (Optional)	D G	Standard Duplex GFI Duplex	

## **Specifications**

#### **OUTLET:**

GFI Duplex Outlet has dual-function indicator light, universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant. Standard Duplex Outlet has universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant.

#### CONSTRUCTION:

Cast aluminum anchor base. Cast aluminum removable access door. Tapered post welded to base. Cast aluminum anchor bolt covers included with post.

#### FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

#### WARRANTY:

Three-year limited warranty.



# Anchor Base Post (779-) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Tenon/Top:

4" O.D.

**Bolt Circle:** 

14" dia.

**Anchor Rods:** 

(4) 3/4" dia. x 15" long galv. steel

**Base Dimensions:** 

14" sq. x 45 3/16"

Shaft:

5" to 4" Tapered

Wall Thickness:

.188'

Height:

12', 14', 16'

## **Pole EPA Values**

	Height			
Windspeed(mph)	12'	14'	16'	
80 ` ' /	35.3700	27.6200	22.3300	
110	18.0100	13.7300	10.7600	
130	15.1500	11.0700	8.1600	