

LIGHTOLIER


by  Signify

Downlighting

Uniframe CFL 5"

1001FIC 1 Light AirSeal IC Frame

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

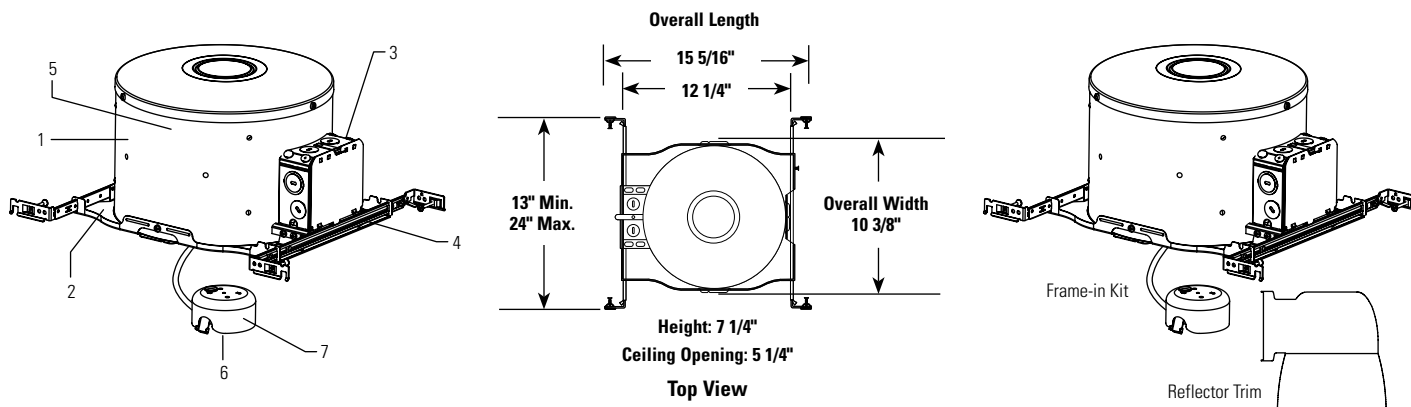

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Frame-In Kit	Uniframe™ Compact Fluorescent Performance Series Reflector Trims					
	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused		Horizontal Cross Blade	
1001F13ICU** 13w Quad/Triple GX24q-1 Base 120v – 0.13amp max 277v – 0.06amp max	1001HCL 1001HCD 1001HWH	1001HCLSW 1001HCDSW 1001HWHSW	Clear Lens 1001HCLC 1001HCDC 1001HWHC	Fresnel 1001HCLF 1001HCDF 1001HWHF	1001HACB 1001HWHCB	
1001F18ICU** 18w Triple GX24q-2 Base 120v – 0.17amp max 277v – 0.08amp max			Opal Lens 1001HCLO 1001HCDO 1001HWHO			
1001F26ICU** 26w Triple GX24q-3 Base 120v – 0.24amp max 277v – 0.11amp max						
Universal Series Reflector Trims (Reference Trim Spec Sheet for Recommended Lamping)						
Cone		Satin Cone	Baffle	Wall Wash	Wet Location	
1012*	1071	1008*	1005*	1035	1021***	
1013*	1045	1010*	1005BNM	1035WH	1024	
1013BK*	1046		1005WH	1085	1078	
1013WH	1046CD		1076	1095		
1013CD*			1076WH	1096		
				1096CD		

*Add NM suffix to catalog number for Natural Metal flange and finish.

**Add N to catalog number for preset nails.

***Only compatible with 13W & 18W Quad lamps.

1001FIC Uniframe CFL 5"

1 Light AirSeal IC Frame

Features

- 1. Housing:** .028" (#21ga.) aluminum. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- 2. Mounting Frame:** .032 (#22 ga.) galvanized steel. Accommodates ceilings up to 1 1/2" thick. 3/8" deep integral lip. Locks into position along length of mounting bars with locking screw and bendable slot. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out roto-clips hold reflector flush to ceiling.
- 3. Junction Box:** 2" X 4" X 3 1/2" (22 cu. in.) .032" (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) 90°C through branch circuit conductors.
- 4. Mounting Bars:** .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. Bars can accommodate 12" O.C joist spacing after a slight field modification (see Instruction Sheet). Features integral self tapping phillips screws for secure attachment to wood or metal construction. Attaches to T-bar ceilings without the need of accessories.
- 5. Ballast:** Mounted inside housing. 120V – 277V UL Listed Electronic Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- 6. Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- 7. Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

Options & Accessories

Extra-Thick Ceiling

Mounting Ring: 1967B - 1 1/4" to 2" thick ceilings

Labels

cULus Listed (Type I.C., Suitable for Damp Location), I.B.E.W.

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

AirSeal® is a registered trademark of Lightolier

