


Page 1 of 1





69" (1753) 46 7/16" (1180)

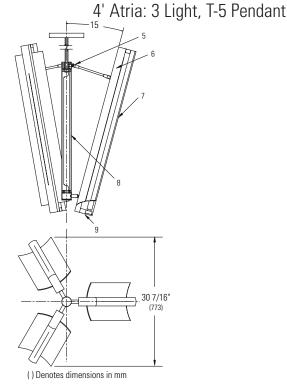

Note: Luminaire can be ordered with or without diffuser shield. Order each separately.

Fixture Ordering Information

Catalog No.	Finish	Wattage	Voltage	Lamping
48354ALU	Metallic Aluminum Powder Coated	3 x 54W	120/277V	T-5 HO, Mini-Bipin
				HO denotes High Output

Diffuser Ordering Information (Order diffuser separately - 3 Diffusers required per fixture) Catalog No. Description Dimensions Finish 40876 Curved Glass Diffuser (3/16" Thick) 6 1/2" W x 43" L Etched outside/ White ceramic coated inside. Polished edges. Curved Acrylic Diffuser (3/16" Thick) 6 1/2" W x 43" L Translucent white acrylic. Textured both sides.

Features

- 1. Canopy: 18 GA. (.048) die formed steel. See above for finish.
- Crossbar: 14 GA. Die formed steel. For mounting to 4" octagonal junction boxes.
- Swivel: Die cast aluminum. Allows for a maximum ceiling slope of 45°. Complies with California earthquake codes.
- 4. Stem: 5/8" diameter steel tubing. See above for finish.
- Pivot Joint: Formed steel. Allows each luminaire arm to splay outward to a maximum of 15° from vertical.
- 6. Housing: Extruded aluminum. See above for finish.
- 7. Lamp Enclosure: Extruded aluminum. See above for finish.
- 8. Center Support: Heavy wall steel tubing. See above for finish.
- 9. End Cap: Die Cast aluminum. See above for finish.

Lamping (by others)

Linear Fluorescent: 54W T5 HO, Mini Bipin

Electrical

Lampholders: G5 (Mini-Bipin) base with rotor for securing lamp. cULus Listed. Ballast: Electronic, HPF, Universal voltage 120V-277V.

	54 Watt	
Voltage	120V	277V
Total Input Watts	182	179
Max. Line Current (Amps)	1.52	0.66
Ballast Factor	1.0	1.0

Min. Starting Temp: 0°F/-18°C

THD<10%

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2009 Philips Group • A0409

Options:

Suspension Kits (for longer drops)

Catalog No.	Description	Finish
4SXT48AL	48" Stem	Metallic Aluminum Powder Coat
4SXT96AL	96" Stem	Metallic Aluminum Powder Coat

Labels:

cULus Listed. Suitable for Damp Locations

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

PHILIPS LIGHTOLIER®