

LIGHTOLIER® CONTROLS

FLUORESCENT OSRAM QUICKTRONIC® POWERSENSE™ AND ADVANCE® MARK 10® 2400 WATT DIMMING AMPLIFIER

Project: _____

Location/Type: _____

Description

The DA2400EB277I Osram Quicktronic® Powersense™ and Advance® Mark 10® Dimming Amplifier is a solid-state unit intended to control a separate lighting circuit regardless of phase. It provides a smooth dimming range using any VA-rated Lightolier® Controls wallbox dimmer, Compli Scenist® controller, or IYTEmode® dimmer module. The unit is intended for wall or ceiling mounting.


Applications

UL Listed to U.S. and Canadian safety standards for the following:

- Fluorescent Advance® Mark 10® Ballasts
- Fluorescent Osram Quicktronic® Powersense™ Ballasts

Features

- Contains a single high quality performance dimmer rated for 2400 watts at 277VAC
- Can be mounted in a ceiling or wall configuration
- Reliable, solid-state circuitry
- Easily installed and wired
- Each unit is a fully enclosed, non-user serviceable module, which can be easily removed from the front and replaced
- Can be combined with any VA-rated Lightolier® Controls wallbox dimmer, Compli Scenist® controller, or IYTEmode® dimmer module

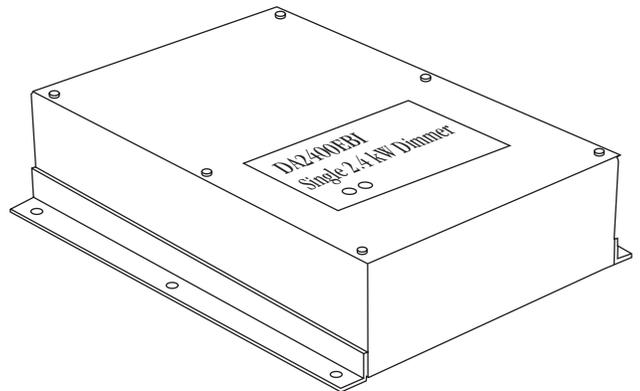


DIMMING AMPLIFIER - DA2400EB2771

Product
Specifications

Specifications

Power:	One 277VAC single-phase, 7.2-amp circuit
Operating Voltage:	Input 277VAC (250 to 305VAC), 60Hz Output regulated to 0.5% per 10-volt line variation
Load:	One circuit, 2400 watts total
Input Control Voltage:	Any VA-rated Lightolier® Controls wallbox dimmer Any VA-rated LYTEmode® dimmer module Any VA-rated Compli Scenist® controller
Operating Temp:	0°C to 40°C
Enclosure:	Fully enclosed, self-contained, single-output unit
Compliance:	UL- and cUL-listed


Dimensions

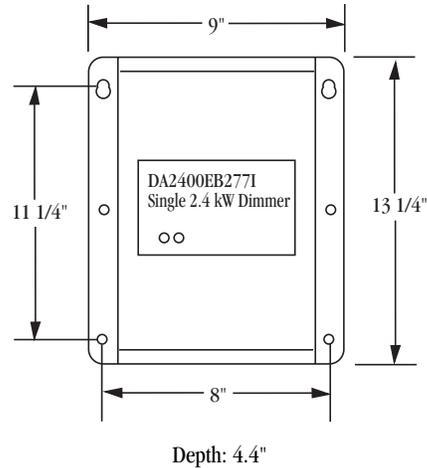


Wiring Diagrams

Consult Lightolier® Controls for input watts per ballast to calculate number of ballasts per device output.

One-Channel Installation

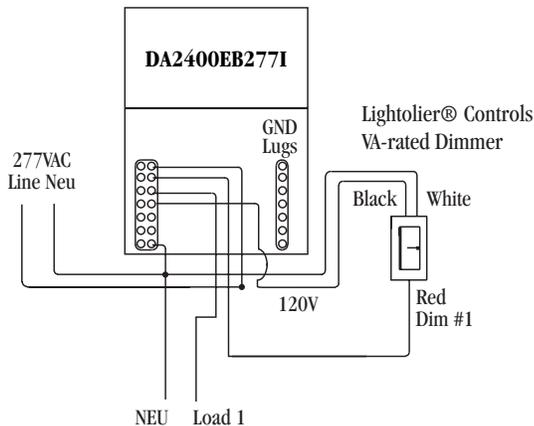

Ballast Wiring

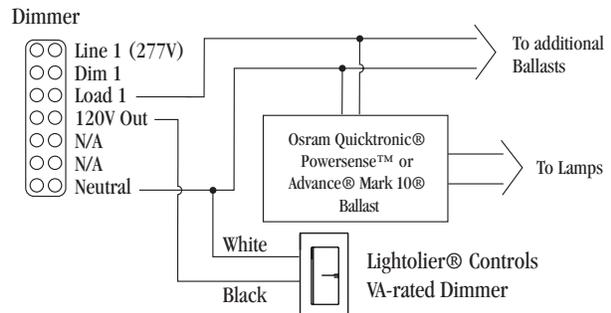

Lightolier® Controls

A Genlyte Company

10911 Petal Street • Dallas, Texas 75238

For technical/sales assistance, call: 1-800-526-2731

Made in U.S.A. ©Lightolier® Controls 2007

www.lolcontrols.com P/N 87-0621